

High Frequency Portable X-Ray Unit

MDM-HF-100


For Human and veterinary use



- Human and Veterinary Use
- High Frequency - (50 kHz)
- Maximum tube voltage is 125kV
- Maximum tube current is 40mA
- mAs Range : 0.3 – 50
- Digital Display
- Tube current and tube voltage are preset to
 - 102-110kV at 25mA 82-100kV at 30mA
 - 62-80kV at 35mA 40-60kV at 40mA
- Unit dimensions:
 - X-Ray Generator: 340mm W x 261mm D x 200mm H.
 - Collimator: 150mm W x 82mm D x 132mm H
- Power offered: 50/60Hz, 100-130V or 208-250V
- Weight : 30Lbs(14kgs)
- Includes carrying case, dimensions: 12.5 x 12.5 x 15.5" (31x 31 x 39cm) wt. 9 Lbs (4.1Kgs)

Optional mobile stand

Carrying case included

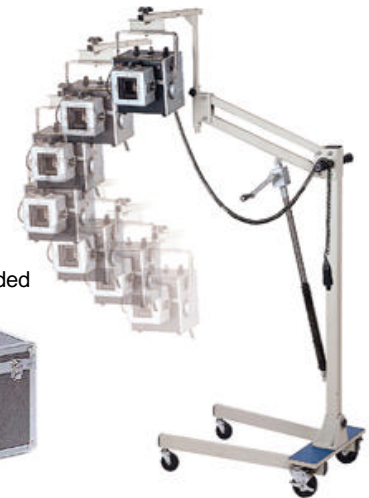

800-544-4743

Tel. (909) 390-9313 Fax (909) 390-9061

website: www.xraymdm.com e-mail: info@xraymdm.com

X M.D. McCauley Co., Inc. **S**
-RAY ACCESSORIES

760 S. Rochester Ave. Unit "C" Ontario, CA 91761 U.S.A.